


# MVC S90-C5-007

For the operation video, please refer to [MVCS90-C5-007 Unboxing](#).


## Minimum Requirements

- An audio (speaker & microphone) system (purchased separately).
- A display connected to MCore Pro (not included).
- A Microsoft Teams Rooms or Skype® for Business account (not included).
- Wired network environment (not included).

## Package Contents

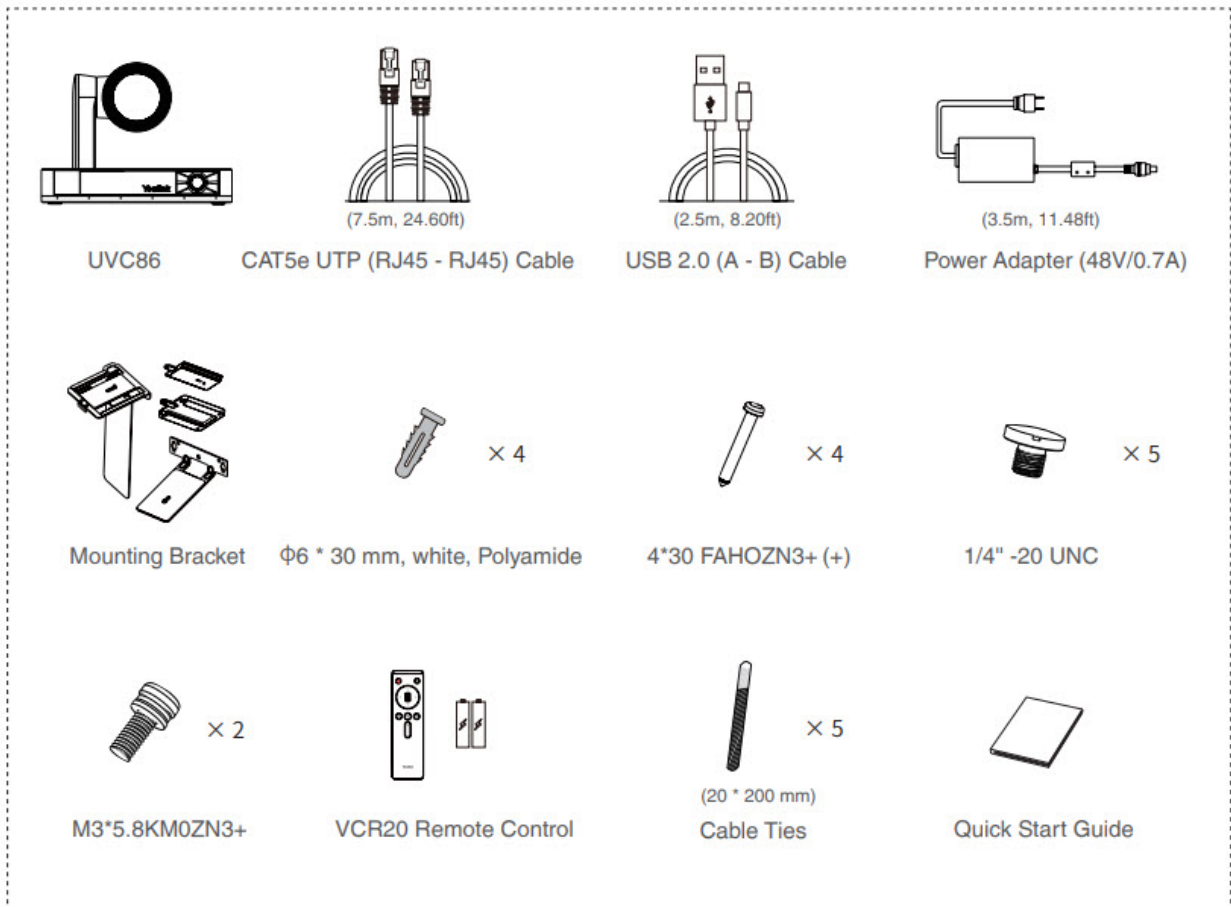


## UVC86 Package\*2

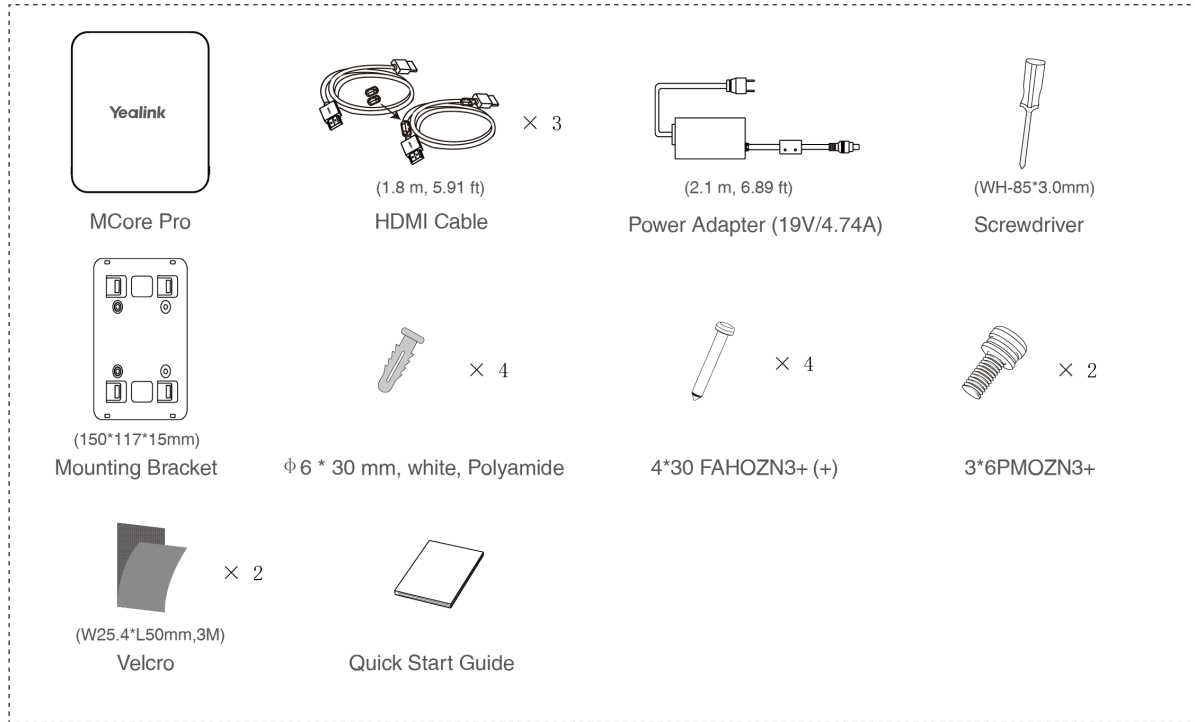


## MCore Pro Package




## MTouch Plus Package

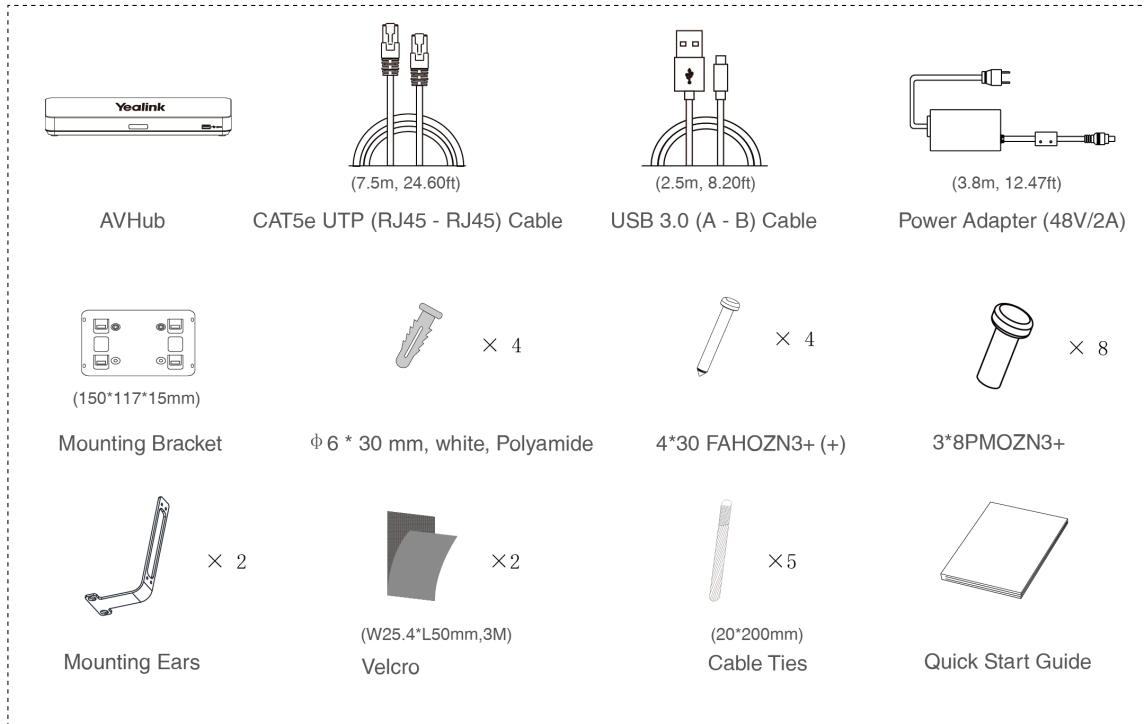

## AVHub Package

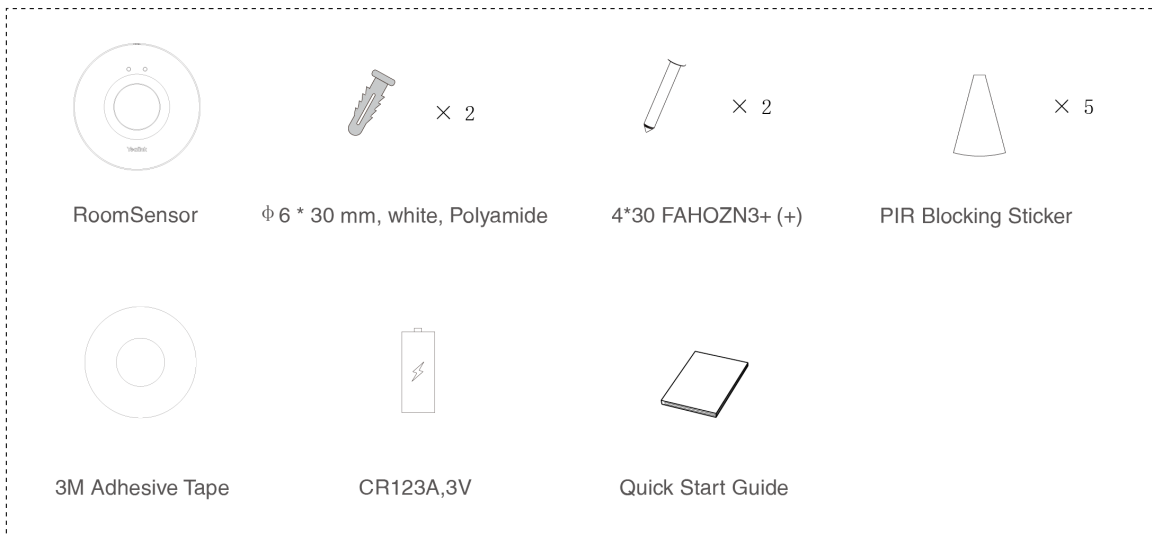

## RoomSensor Package

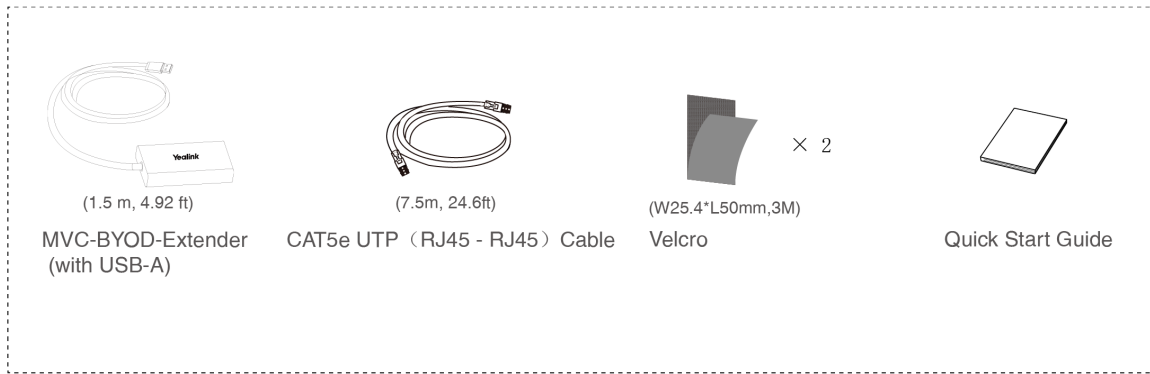


## MVC-BYOD-Extender Package

### Install MVCS90-C5-007

- **MCore Pro** supports: wall mounting, TV mounting, or placing on a table.
- **MTouch Plus** supports: placing on a table, attaching to a table, fixing on a table, or wall mounting.
- **UVC86** supports: placing on a flat surface, mounting on top of a display, wall mounting, ceiling mounting, or TV mounting.
- **AVHub** supports: wall mounting, attaching under a table, placing on a desk, or mounting on a rack.
- **RoomSensor** supports: ceiling mounting or wall mounting.
- Install and deploy the system accessories according to the environment and actual needs. For detailed installation and deployment instructions, please refer to the quick start guide for each product.

### Connect MVCS90-C5-007

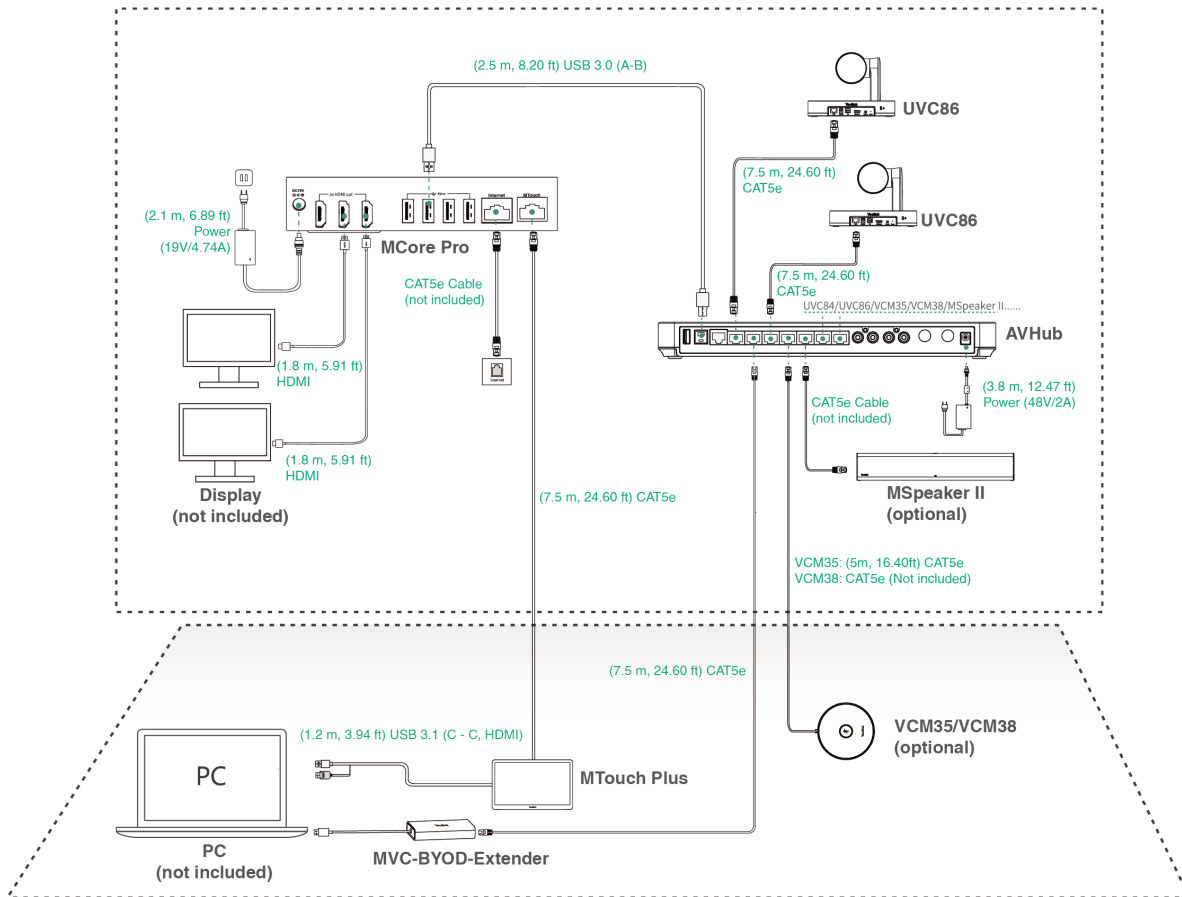

**NOTE**

- When starting the system for the first time, you need to connect a mouse to complete the initial configuration. We recommend using a wireless mouse and keyboard kit.
- The maximum cable connection distance from MCore Pro to the MTouch Plus/E2 is 40m/131ft and cannot be extended.
- **Not included accessories:**
  - **Display:** Must have a resolution of 1080p or higher and an HDMI port.
  - **PC:** Must be equipped with an HDMI or USB-C port (supporting DP protocol).
  - **Ethernet cable:** CAT5e or higher.
  - **HDMI cable:** Standard HDMI cable.
  - **PoE switch:** Required if using PoE to connect speakers or cameras (PoE+ required).
- A **USB-C cable** with DisplayPort standard is recommended for MTouch Plus/E2 content sharing. The original content share cable in the MVC kits can also be purchased separately.

**Supported Accessories**


For the compatible devices and the maximum number of compatible devices, please refer to [Teams Room Accessories Compatibility Lists](#).

## Initial Setup

When the hardware deployment and connections are completed, you need to set up your Microsoft Teams Room System (MVC) system. Please refer to [Quick Setup](#) for more details.

## Features

### Control Camera Position

1. Sign in to your MVC system using a Skype for Business or Microsoft Teams account.
2. Tap **More** >  to access the Camera Control page.

### Pair with a RoomSensor/RoomSensor Pro

1. [Switch the account from Skype to Admin](#) .
2. Open Yealink RoomConnect Software.
3. Go to **MTouch Plus** > **Device Status** > **Sensor**.
4. Select **Add** and follow the on-screen instructions to pair.

#### **NOTE**

- An MTouch Plus can be paired with only one RoomSensor/RoomSensor Pro.
- The distance between the MTouch Plus and RoomSensor/RoomSensor Pro must be within 20m.