

# **KEY FEATURES**

The DiGiCo DMI-DANTE 64@96 is an option card to expand the I/O of selected DiGiCo products. The DMI-DANTE 64@96 provides 64 inputs and 64 outputs at both 48kHz and 96kHz.

- 64 inputs and 64 outputs at 48kHz and 96kHz
- 1 RJ45 port
- 2 Ethercon ports
- Two port modes switched and redundant
- Inbuilt SRC

#### CONNECTIONS

1 x RJ45 port

2 x Ethercon ports

### SIGNAL PROCESSING

64 Inputs and 64 Outputs at 48kHz and 96kHz Inbuilt SRC between 48kHz and 96kHz

## **OPTIONS**


Compatible With: S-Series / SD12 / Quantum Range / Orange Box / 4REA4



## DiGiCo Multichannel Interface

DiGiCo DMI cards are perfect for expanding your console I/O, providing interfaces with industry formats be it Analogue expansion, MADI, Dante, Waves Soundgrid or Calrec's Hydra 2 Network.

All bases are covered

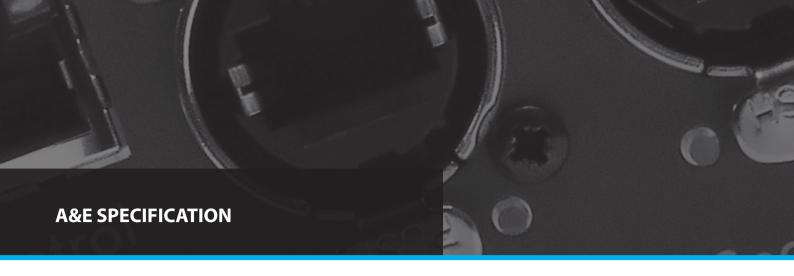


The DiGiCo DMI-DANTE 64@96 shall allow 64 inputs and 64 outputs at both 48kHz and 96kHz.

The front plate of the DMI-DANTE 64@96 shall have one RJ45 port and two Ethercon ports. There shall be two modes that the ports can use. In Switched mode, the three ports shall be switched together. In Redundant mode, the Control and Primary ports shall be switched together and work as a redundant pair with the Secondary port, with each having separate IP addresses so that if the primary connection fails, the secondary connection shall take over. The user shall be able to change the mode in Dante Controller.

The dimensions of the DMI-DANTE 64@96 shall be: 126.4 (w) x 176.3 (d) x 58 (h) mm

The weight of the DMI-DANTE 64@96 shall be: 261g




## **PHYSICAL**

Dimensions: 126.4mm (w) x 176.3mm (d) x 58mm (h)

Weight: 260g

Product Code: MOD-DMI-DANTE2

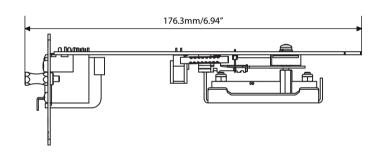

#### **AUDIO SPECIFICATIONS**

Sample Rate: 48kHz or 96kHz

#### DiGiCo HQ

Unit 10 Silverglade Business Park Leatherhead Road, Chessington, Surrey, KT9 2QL, United Kingdom info@digiconsoles.com

©DiGiCo 2019. All brand and product names are copyright to their respective owners E&OE

